


COMANSA 5 LC 3510

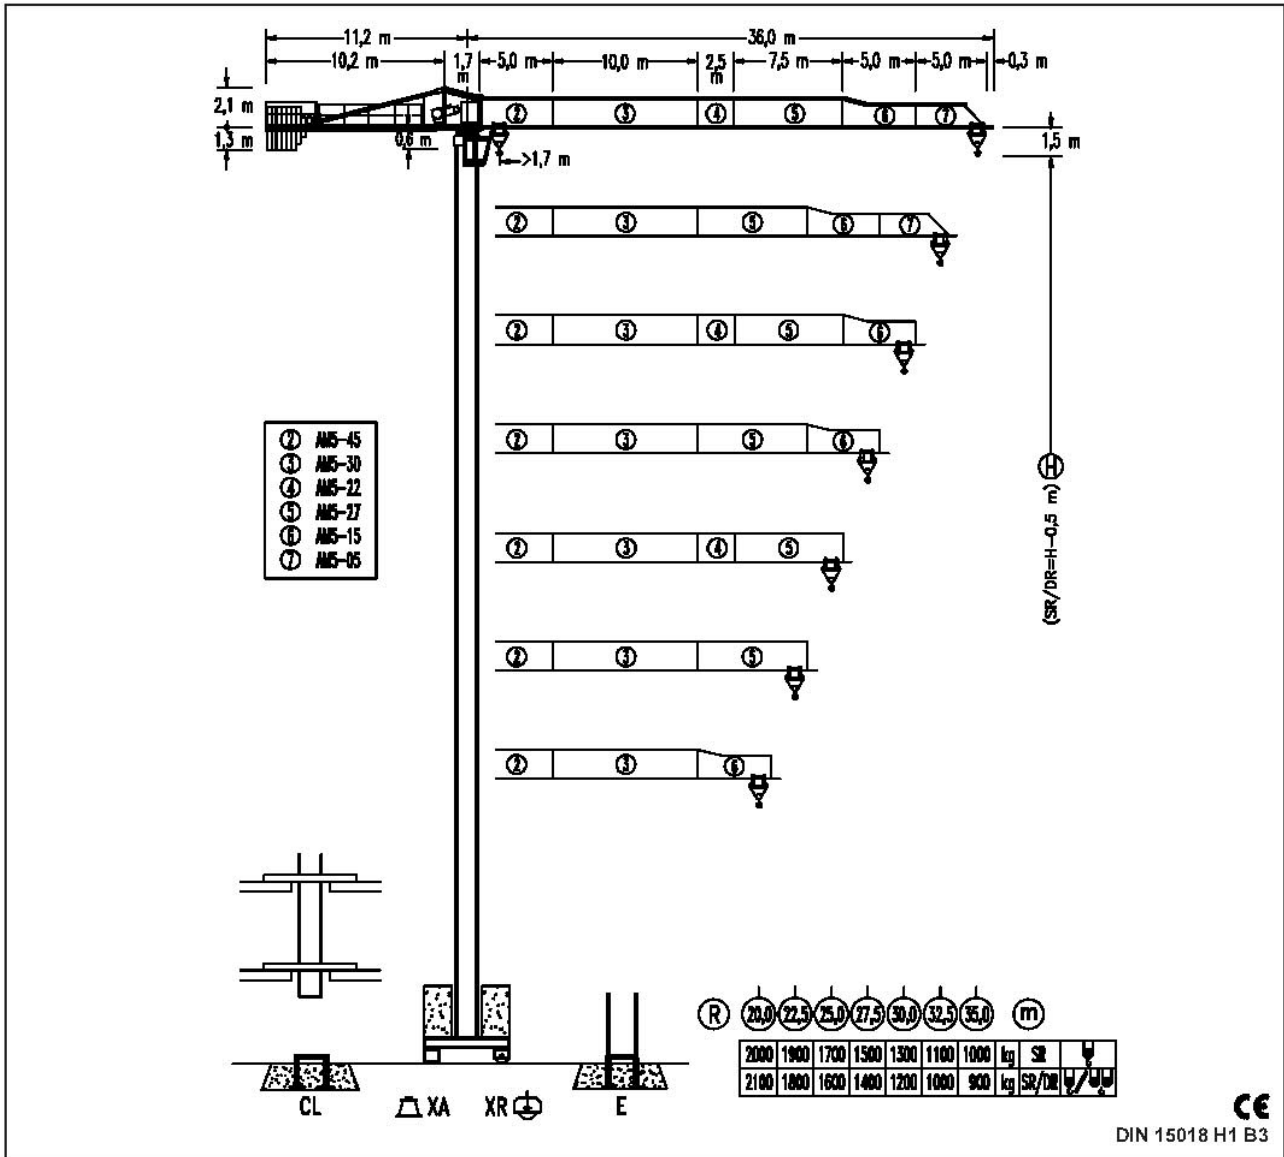

CE
DIN 15018 H1 B3

R	SR	R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	m
35,0	SR	19,5 m	2000	1950	1700	1500	1340	1210	1100	1000	kg
35,0	SR/DR	10,6 m	4000	1870	1620	1420	1250	1110	1000	900	
32,5	SR	19,6 m	2000	1950	1710	1510	1350	1210	1100		kg
32,5	SR/DR	10,6 m	4000	1880	1620	1420	1250	1120	1000		
30,0	SR	20,8 m	2000	2000	1820	1610	1440	1300			kg
30,0	SR/DR	11,2 m	4000	2010	1740	1520	1340	1200			
27,5	SR	21,5 m	2000	2000	1890	1680	1500				kg
27,5	SR/DR	11,5 m	4000	2080	1800	1580	1400				
25,0	SR	21,7 m	2000	2000	1920	1700					kg
25,0	SR/DR	11,6 m	4000	2110	1820	1600					
22,5	SR	21,5 m	2000	2000	1900						kg
22,5	SR/DR	11,5 m	4000	2080	1800						
20,0	SR	20,0 m	2000	2000							kg
20,0	SR/DR	11,6 m	4000	2100							