


# COMANSA LC 1040

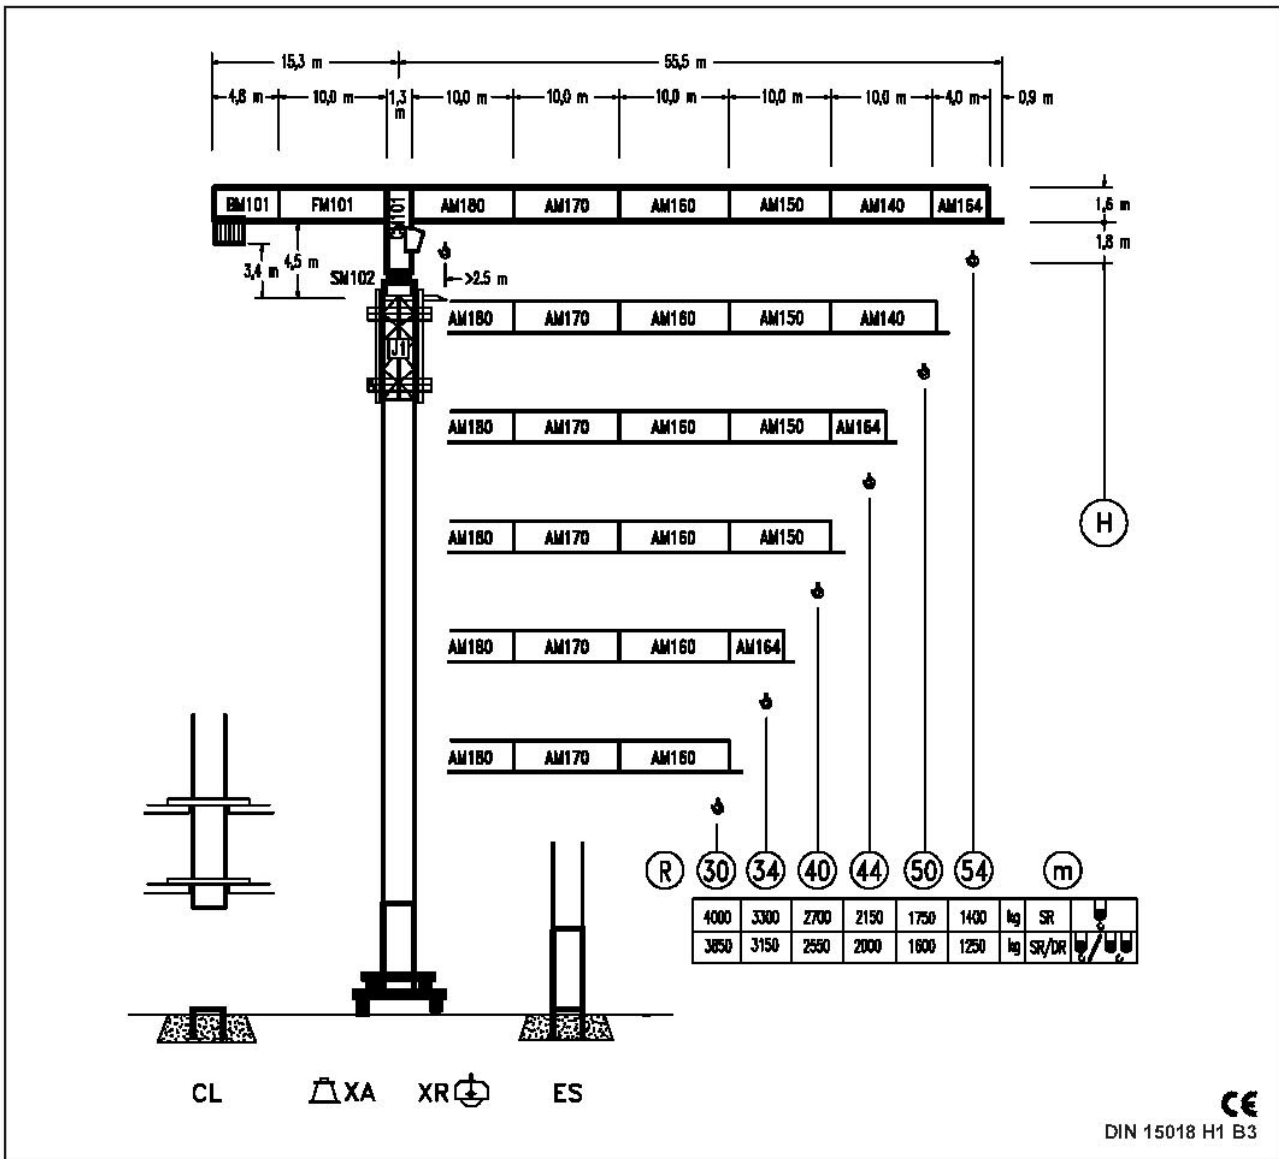

CE  
DIN 15018 H1 B3

(R)		R <sub>(Cmax)</sub>	C <sub>max</sub>	25	30	34	40	44	50	54	
(54)	SR	22,6 m	4000	3565	2890	2490	2050	1820	1550	1400	
	SR/DR	12,1 m	8000	3445	2760	2355	1905	1675	1400	1250	
(50)	SR	24,9 m	4000	3975	3230	2790	2300	2050	1750		
	SR/DR	13,3 m	8000	3855	3095	2655	2160	1905	1600		
(44)	SR	25,9 m	4000	4000	3375	2920	2410	2150			
	SR/DR	13,7 m	8000	4025	3235	2780	2265	2000			
(40)	SR	28,4 m	4000	4000	3765	3260	2700				
	SR/DR	15,1 m	8000	4485	3620	3115	2650				
(34)	SR	28,7 m	4000	4000	3805	3300					
	SR/DR	15,2 m	8000	4535	3660	3150					
(30)	SR	30,0 m	4000	4000	4000						
	SR/DR	15,8 m	8000	4760	3850						