


COMANSA LC 5013

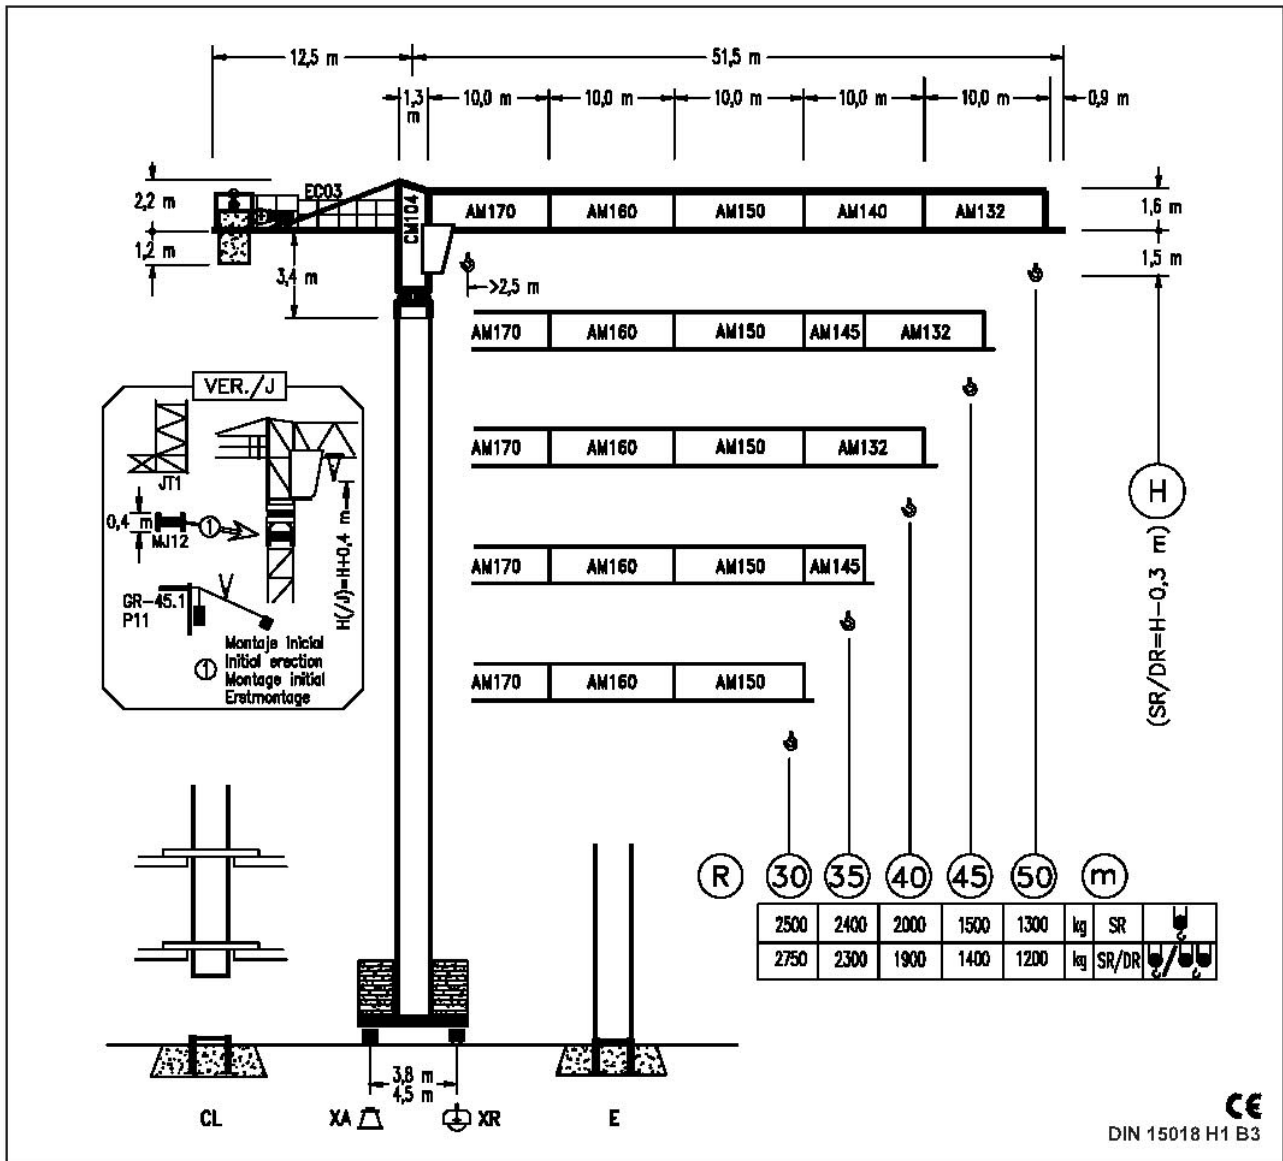

CE
DIN 15018 H1 B3

R		R _(Cmax)	C _{max}	25	30	35	40	45	50	m
50	SR	28,5 m	2500	2500	2360	1980	1700	1480	1300	kg
50	SR/DR	15,4 m	5000	2860	2310	1910	1610	1380	1200	
45	SR	28,9 m	2500	2500	2400	2010	1720	1500		kg
45	SR/DR	15,5 m	5000	2900	2330	1930	1630	1400		
40	SR	31,9 m	2500	2500	2500	2330	2000			kg
40	SR/DR	17,5 m	5000	3330	2690	2240	1900			
35	SR	33,8 m	2500	2500	2500	2400				kg
35	SR/DR	17,9 m	5000	3420	2760	2300				
30	SR	30,0 m	2500	2500	2500					kg
30	SR/DR	17,8 m	5000	3400	2750					